


DATA SHEET

öko skin stripes



RIEDER

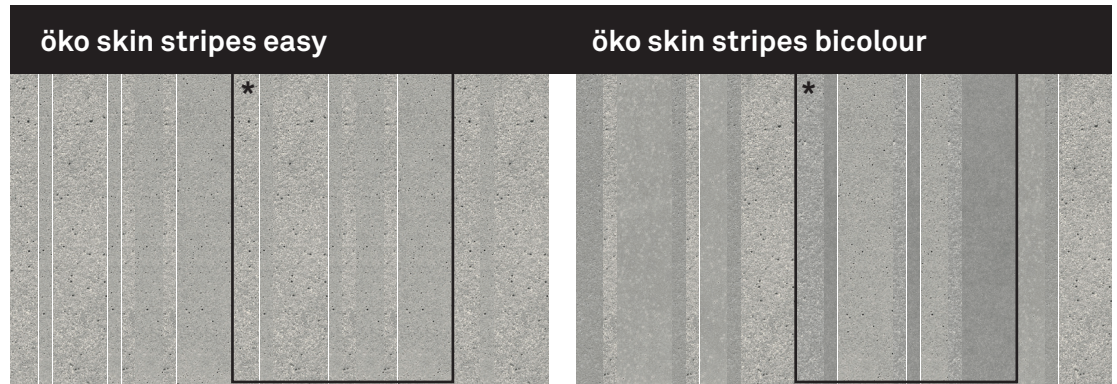

Colours	1 colour	2 colours
Surfaces	Mix of ferro light + ferro	Mix of matt + ferro light + ferro (extra contrast)

Material	
Length	2500 mm, 3100 mm / 98.42", 122" (US)
Width	70 mm, 147 mm and 302 mm / 2.76", 5.79" and 11.89" (US) sequencing of slats is pre-defined
Thickness	13 mm / 0.5" (US)
Colour collection	greyscale, pietra, timber, bricky
Texture	standard

Handling	
Mounting	Manually or with vacuum suction; slats must be handled with special care

Fixing	
Visible: rivet, screw	Distance to slat edge at least 30 mm / 1.18" (US)
Concealed: adhesive, undercut anchor (on request)	Distance to slat edge (vertically) at least 100 mm / 3.93" (US) Distance to slat edge (horizontally): with 70 mm and 147 mm / 2.76" and 5.79" (US) once in the middle; with 302 mm / 11.89" (US) minimum distance to slat edge 60 mm / 2.36" (US) (with point attachment: 2 pieces) Maximum distance between two vertical attachment points: 600 mm / 23.62" (US) Additional supporting structure or bracing required depending on statics.

Scope of delivery	
Palletisation	Mix of colours, surfaces and the sequencing used for the three slat-widths is pre-defined on the pallet. 8 slats per layer (4 x 70 mm, 2 x 147 mm, 2 x 302 mm / 4 x 2.76", 2 x 5.79" and 2 x 11.89" (US)) in colour and surface mix (according to visualisation*). Modular pre-assembly on request. 16 layers per pallet (47 m ² / 505.90 ft ² (US) of 2500 mm length 58 m ² / 624.31 ft ² (US) of 3100 mm length.

Ara Institute of Canterbury, Jasmx

